



a range of high % open area meshes suitable for many RFI & EMS applications in corrosion resistant 316 Stainless

Stainless Steel Mesh RFI & EMS


reference	200	300	550	870	1300
Free Area	60.8	62.5	68.8	67.3	72.5 %
Wire Diameter	0.056	0.076	0.114	0.190	0.236 mm
Nominal Aperture	198	287	554	868	1352 micron
Mesh per 25.4	100	70	38	24	16
Weave Type	plain				
Weight, kg per m2	0.16	0.20	0.25	0.43	0.44

Typical Composition (key elements)

Nickel	10-14%
Chrome	16-18%
Molybdenum	2-3.0%

Available Formats *- please ask for options not listed below*

Rolls	✓	up to	1220 mm wide
Pieces	✓		
Circles	✓		
Panels	✓		
Strips	✓		

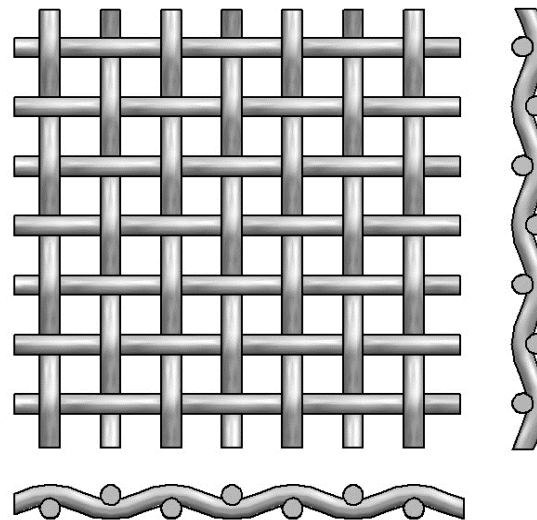

weave image

all information is provided in good faith - actual values may vary according to available stock and standard norms
weights and measures are nominal values only
in accordance with the requirements of ISO 9044 latest issue

contact sales@unitedwire.com
visit www.unitedwire.com
call **(+44) (0)131 552 6241**

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Email: info@unitedwire.com · Website: www.unitedwire.com

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

